

# Fiche Technique

## EO Round LED



☐ Blanc ☐ Noir ☐ Gris ☐ RAL

### Caractéristiques:

|                           |              |
|---------------------------|--------------|
| Taille de découpe         | N/A          |
| Min. hauteur encastrée    | N/A          |
| Poids                     | Voir dessous |
| IP                        | 20           |
| Classe d'isolation        | I            |
| Essai du fil incandescent | 850 °C       |
| RoHS                      | Oui          |
| Sans UV                   | Oui          |
| Certification             | CE           |

### Source de lumière:

|                        |               |
|------------------------|---------------|
| Lumen                  | Voir dessous  |
| Température de couleur | 3000K - 4000K |
| CRI                    | Ra 80         |
| Refroidissement        | Passif        |
| Efficience             | Voir dessous  |
| SDCM                   | <5            |
| Durée de vie           | 50.000h       |
| LB valeur              | L70B10        |






### Alimentation:

|                |              |
|----------------|--------------|
| Driver         | Inclus       |
| Voltage        | 230V         |
| Max. puissance | Voir dessous |

### Options:

|                      |      |
|----------------------|------|
| Barndoors            | Non  |
| Nid d'abeille        | Non  |
| Filtre UV            | N/A  |
| Filtres              | Non  |
| Dimmable             | DALI |
| Eclairage de secours | Non  |
| Fixpoint             | Non  |

### Reflectors:

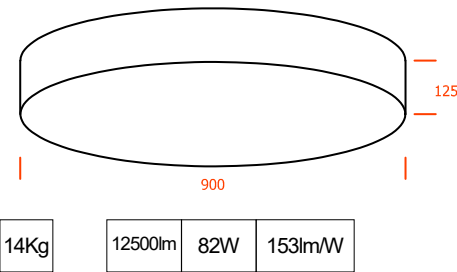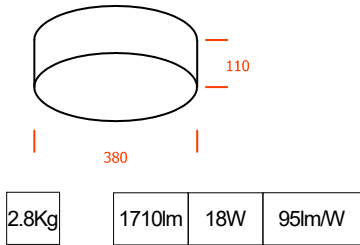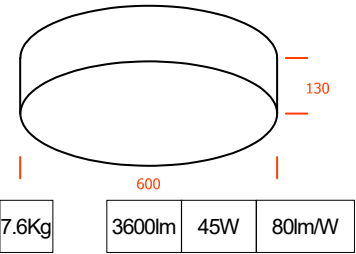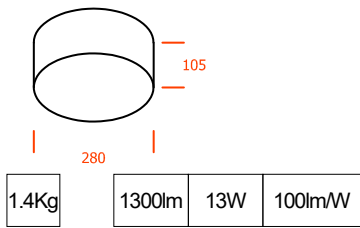

# Data Sheet

## EO Round LED



☐ White ☐ Black ☐ Grey ☐ RAL

### Characteristics:

|                      |           |
|----------------------|-----------|
| Cut-out size         | N/A       |
| Min. recessed height | N/A       |
| Weight               | See below |
| IP                   | 20        |
| Isolation class      | I         |
| Glow wire test       | 850 °C    |
| RoHS                 | Yes       |
| UV free              | Yes       |
| Certification        | CE        |

### Light source:

|                    |               |
|--------------------|---------------|
| Lumen              | See below     |
| Colour temperature | 3000K - 4000K |
| CRI                | Ra 80         |
| Cooling            | Passif        |
| Efficiency         | See below     |
| SDCM               | <5            |
| Lifetime           | 50.000h       |
| LB value           | L70B10        |

### Power supply:

|            |           |
|------------|-----------|
| Driver     | Included  |
| Voltage    | 230V      |
| Max. power | See below |

### Reflectors:

