

# Fiche Technique

## EO LED V2

Standard



### Caractéristiques:

Taille de découpe	595 x 595mm
Min. hauteur encastrée	10.5mm
Poids	4.1kg
IP	20
Classe d'isolation	II
Essai du fil incandescent	850 °C
RoHS	Oui
Sans UV	Oui
Certification	CE

### Source de lumière:

Lumen	3000 lm
Température de couleur	3000K - 4000K
CRI	Ra 80
Refroidissement	Passif
Efficience	100 lm/W
SDCM	<5
Durée de vie	50.000h
LB valeur	L70B10





### Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	30W

### Options:

Barndoors	N/A
Nid d'abeille	N/A
Filtre UV	N/A
Filtres	Non
Dimmable	DALI
Eclairage de secours	Non
Fixpoint	N/A
Kit de suspension	Oui

### Reflectors:

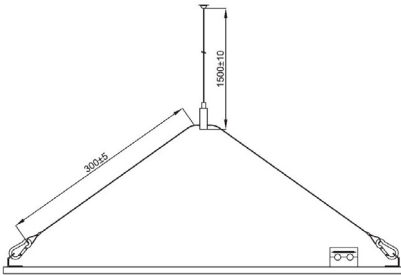

# Data Sheet

## EO LED V2

Standard



### Characteristics:

Cut-out size	595 x 595mm
Min. recessed height	10.5mm
Weight	4.1kg
IP	20
Isolation class	II
Glow wire test	850 °C
RoHS	Yes
UV free	Yes
Certification	CE

### Light source:

Lumen	3000 lm
Colour temperature	3000K - 4000K
CRI	Ra 80
Cooling	Passif
Efficiency	100 lm/W
SDCM	<5
Lifetime	50.000h
LB value	L70B10

### Power supply:

Driver	Included
Voltage	230V
Max. power	30W

### Reflectors:

