

Fiche Technique

Lara LED Lens



☐ Blanc
 ☐ Noir
 ☐ Gris
 ☐ Chroom
 ☐ RAL

Caractéristiques:

Taille de découpe	N/A
Min. hauteur encastrée	N/A
Poids	1.4kg
IP	20
Classe d'isolation	II
Essai du fil incandescent	850 °C
RoHS	Oui
Sans UV	Oui
Certification	CE

Source de lumière:

Température de couleur	2700K - 3000K - 3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Refroidissement	Passif
Efficience	92%
SDCM	<3
Durée de vie	50.000h
LB valeur	L80B10




Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	32W

Options:

Barndoors	Non
Nid d'abeille	Oui
Filtre UV	Oui
LED couleur	Oui
Dimmable	1 DALI & 2 Phase & 3 Casambi
Eclairage de secours	Non
Fixpoint	Oui

Reflectors:

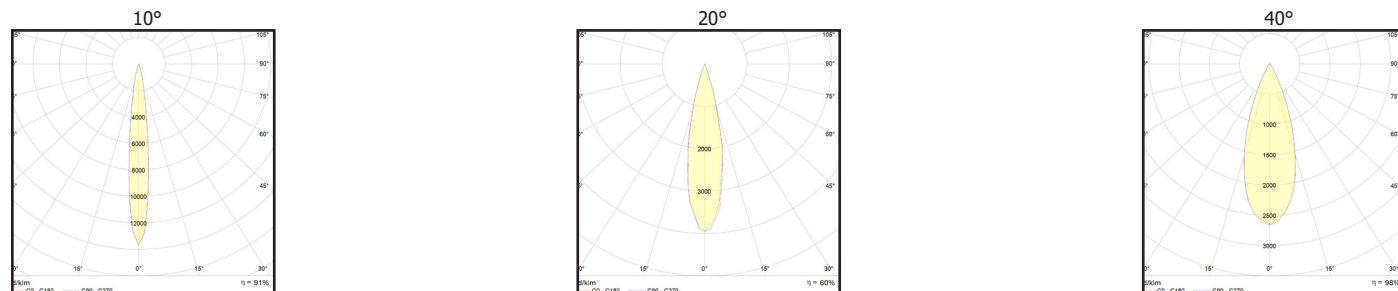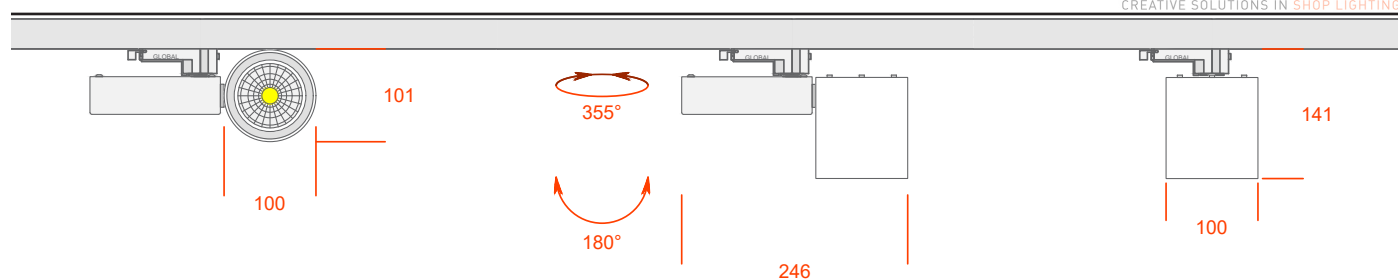

	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
13 700	-	8.0W	-	-	108	112	112	118	121
13 1000	8.0W	10.0W	133	136	106	109	109	115	119
13 1500	14.0W	14.0W	124	128	102	105	105	111	114
13 2000	20.0W	20.0W	108	110	96	99	99	104	107
13 2500	24.0W	32.0W	103	106	77	79	80	85	87
13 3000	30.0W	-	98	100	-	-	-	-	-
3500	-	-	-	-	-	-	-	-	-
4000	-	-	-	-	-	-	-	-	-
4500	-	-	-	-	-	-	-	-	-

Data Sheet

Lara LED Lens



☐ White
 ☐ Black
 ☐ Grey
 ☐ Chrome
 ☐ RAL

Characteristics:

Cut-out size	N/A
Min. recessed height	N/A
Weight	1.4kg
IP	20
Isolation class	II
Glow wire test	850 °C
RoHS	Yes
UV free	Yes
Certification	CE




Light source:

Colour temperature	2700K - 3000K - 3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Cooling	Passif
Efficiency	92%
SDCM	<3
Lifetime	50.000h
LB value	L80B10

Power supply:

Driver	Included
Voltage	230V
Max. power	32W

Reflectors:

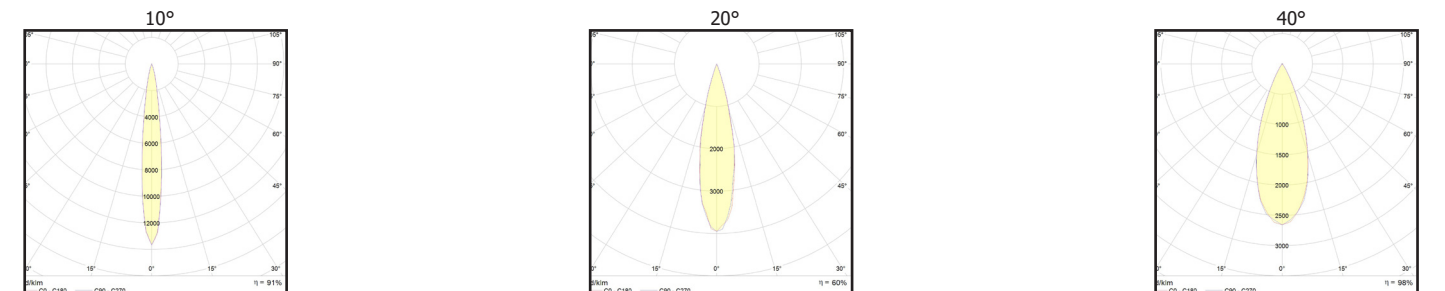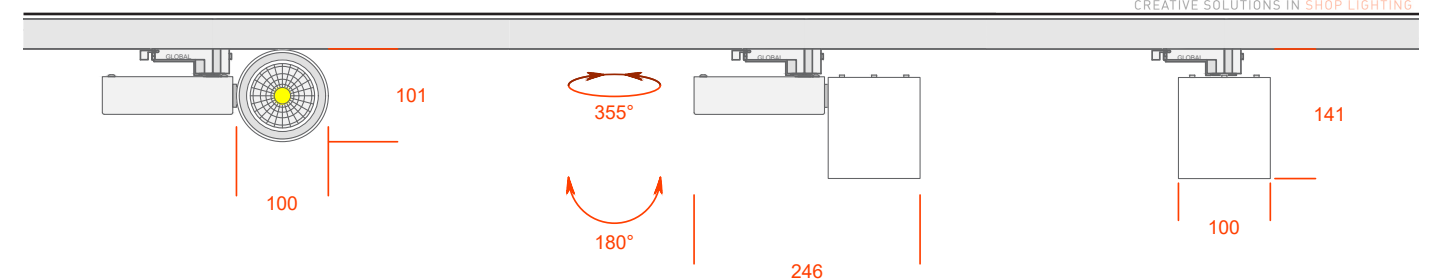


	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
13 700	-	8.0W	-	-	108	112	112	118	121
13 1000	8.0W	10.0W	133	136	106	109	109	115	119
13 1500	14.0W	14.0W	124	128	102	105	105	111	114
13 2000	20.0W	20.0W	108	110	96	99	99	104	107
13 2500	24.0W	32.0W	103	106	77	79	80	85	87
13 3000	30.0W	-	98	100	-	-	-	-	-
3500	-	-	-	-	-	-	-	-	-
4000	-	-	-	-	-	-	-	-	-
4500	-	-	-	-	-	-	-	-	-



Fiche d'Installation Installation Manual


STEP 1

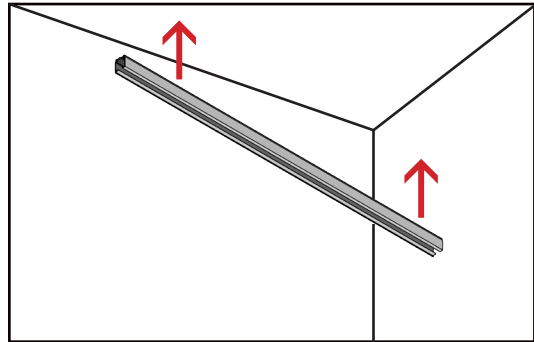

Pose du rail au plafond

Installation of the track on the ceiling


STEP 3

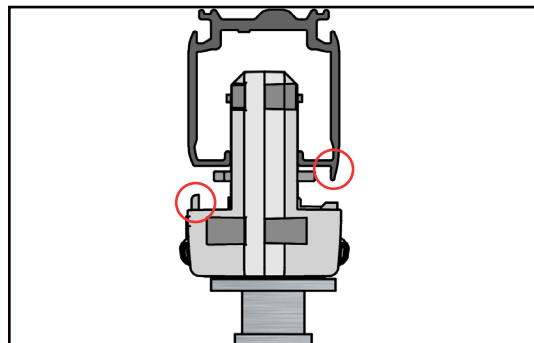

Mettre les 2 ergots à l'opposé l'un de l'autre

Put the 2 pins opposite each other


STEP 5

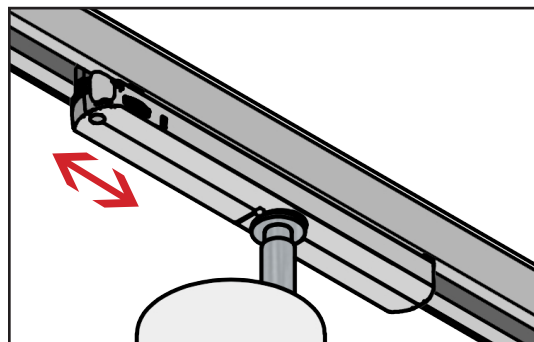

Sélectionnez la phase correspondante

Select the corresponding phase


STEP 2

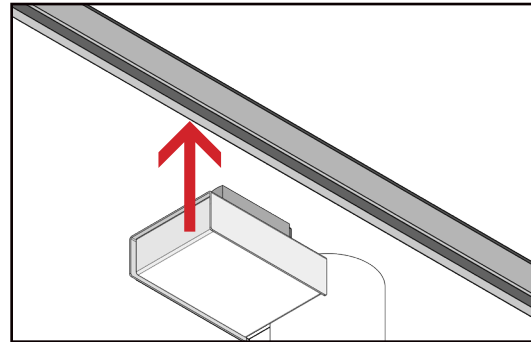

Inserer le spot dans le rail

Insert the spotlight into the track


STEP 4

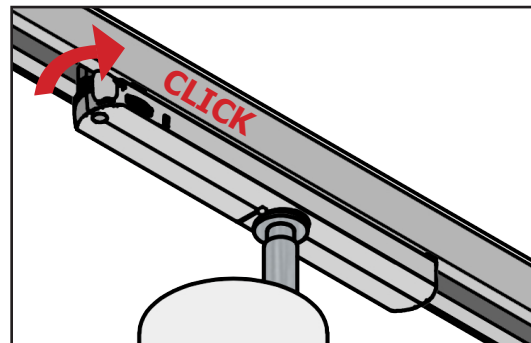

Enclencher le selecteur (Click)

Switch on the selector (Click)

STEP 6

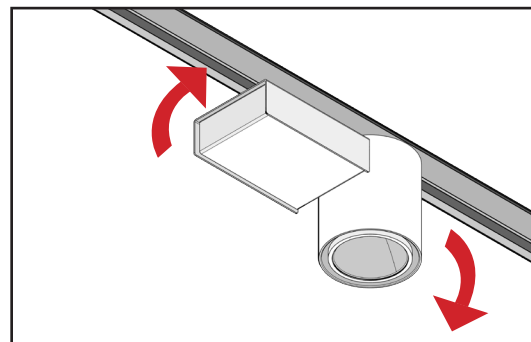


Orientez le spot dans la direction choisie.

Point the spotlight in the chosen direction




Lara LED Lens

Barndoor



Nid d'abeille
Honeycomb



Filtre UV
UV filter



Fixpoint



Technique de Gradation
Dimming Technology



CASAMBI

LED couleur / Colour LED



* L'installation de l'éclairage doit être effectuée par un installateur qualifié
* Installer uniquement sur des surfaces non conductrices
* Le luminaire contient une source de lumière LED non interchangeable
* Les tentatives de remplacement mettent fin à l'accord de garantie
* Remplacer le luminaire à la fin de la durée de vie prévue
* Remplacer la batterie lorsque l'autonomie n'est plus atteinte (le cas échéant)

* Installation of the lighting must be carried out by a certified installer
* Install only on non-conductive surfaces
* Luminaire contains a non-interchangeable LED light source
* Replacement attempts terminate the warranty agreement
* Replace the luminaire at the end of the expected service life
* Replace the battery when autonomy is no longer achieved (if applicable)