

Fiche Technique

EO LED V3

UGR < 19



Caractéristiques:

Taille de découpe	595 x 595mm	Lumen	3300 lm
Min. hauteur encastrée	10.5mm	Température de couleur	3000K - 4000K
Poids	4.1kg	CRI	Ra 80
IP	20	Refroidissement	Passif
Classe d'isolation	II	Efficience	100 lm/W
Essai du fil incandescent	850 °C	SDCM	<5
RoHS	Oui	Durée de vie	50.000h
Sans UV	Oui	LB valeur	L70B10
Certification	CE		

Source de lumière:




Options:

Barndoors	N/A
Nid d'abeille	N/A
Filtre UV	N/A
Filtres	Non
Dimmable	DALI
Eclairage de secours	Non
Fixpoint	N/A
Kit de suspension	Oui

Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	33W

Reflectors:

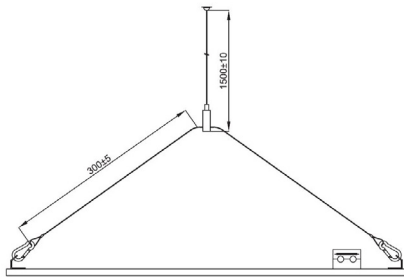

0°-180° 90°-270°

Data Sheet

EO LED V3

UGR < 19



Characteristics:

Cut-out size	595 x 595mm	Lumen	3300 lm
Min. recessed height	10.5mm	Colour temperature	3000K - 4000K
Weight	4.1kg	CRI	Ra 80
IP	20	Cooling	Passif
Isolation class	II	Efficiency	100 lm/W
Glow wire test	850 °C	SDCM	<5
RoHS	Yes	Lifetime	50.000h
UV free	Yes	LB value	L70B10
Certification	CE		

Light source:




Options:

Barndoors	N/A
Honeycomb	N/A
UV filter	N/A
Filters	No
Dimmable	DALI
Emergency light	No
Fixpoint	N/A
Suspensionkit	Yes

Power supply:

Driver	Included
Voltage	230V
Max. power	33W

Reflectors:

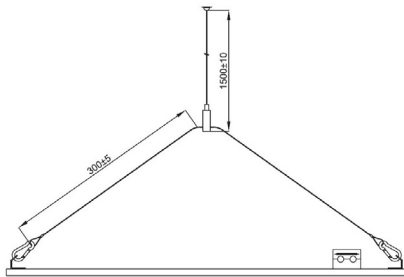

0°-180° 90°-270°