

SOLUTIONS IN LINEAR LED LIGHTING



Citizen LED



PRO-LED

Tailor-made led profile (linear - rectangular or square frame - U-shape) in anodized aluminium with pre-punched holes for mounting.

4000°K: 320LM PER 3 WATT LED

CRI 85 >

CCT 2700K
3000K
3500 K
4000K
5000K

ACCESSORIES



MORE INFORMATION

12V

24 V


850°C

IP20

CE

RoHS

Driver included

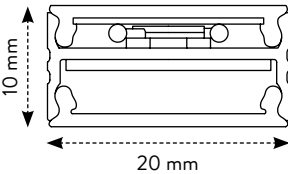

RANGE OF POSSIBLE LENGTHS	NUMBER OF LED (1 LED=3W)
min. 180 to 360mm	1
min. 360 to 720mm	2
min. 540 to 1080mm	3
min. 720 to 1500mm	4
min. 900 to 1500mm	5
min. 1080 to 1500mm	6
min. 1260 to 1500mm	7
min. 1440 to 1500mm	8



Single colour LED strips



PRO-LED

Two-sided adhesive tape to be installed on solid heat-conducting surfaces:

4000°K: 11w/m: 765lm/m
19w/m: 1530 lm/m
33w/m: 3016 lm/m

CRI 80 >

CCT 2400K
2700K
3000K
4000K
6000K

ACCESSORIES



Various anodized aluminium ledstrip profiles in combination with frosted/semi-frosted/clear covers are available.

MORE INFORMATION

24 V

850°C

IP20

CE


RoHS

Driver included

REFLECTORS



120°

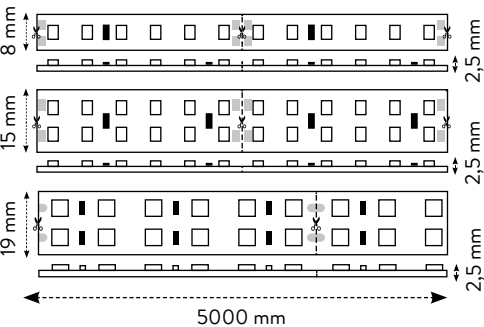

11W: cuttable every 5cm

19W: cuttable every 5cm

33W: cuttable every 8,33cm

Projection.