

Fiche Technique

Acco LED



Gris



Caractéristiques:

Taille de découpe	N/A
Min. hauteur encastrée	N/A
Poids	Voir dessous
IP	65
Classe d'isolation	I
Essai du fil incandescent	850 °C
RoHS	Oui
Sans UV	Oui
Certification	CE

Source de lumière:

Lumen	Voir dessous
Température de couleur	4000K
CRI	Ra 80
Refroidissement	Passif
Efficience	Voir dessous
SDCM	<5
Durée de vie	50.000h
LB valeur	L80B10

Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	Voir dessous



Options:

Barndoors	Non
Nid d'abeille	Non
Filtre UV	N/A
Couleurs Filtres	Non
Dimmable	DALI & Casambi
Eclairage de secours	1h
Fixpoint	Non


Reflectors:



120°

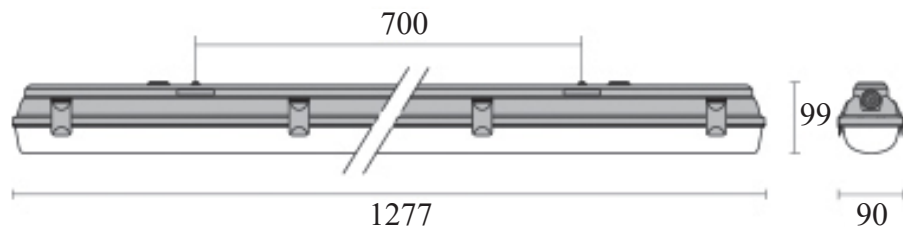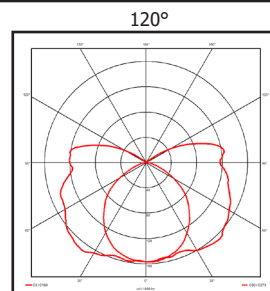

4Kg	4500lm	39W	102lm/W
-----	--------	-----	---------

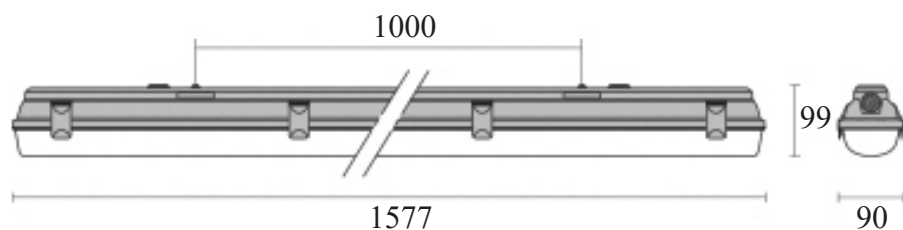

4Kg	5250lm	45W	116lm/W
-----	--------	-----	---------

Data Sheet

Acco LED



Grey



Characteristics:

Cut-out size	N/A
Min. recessed height	N/A
Weight	See below
IP	65
Isolation class	I
Glow wire test	850 °C
RoHS	Yes
UV free	Yes
Certification	CE

Light source:

Lumen	See below
Colour temperature	4000K
CRI	Ra 80
Cooling	Passif
Efficiency	See below
SDCM	<5
Lifetime	50.000h
LB value	L80B10



Power supply:

Driver	Included
Voltage	230V
Max. power	See below


Reflectors:



120°

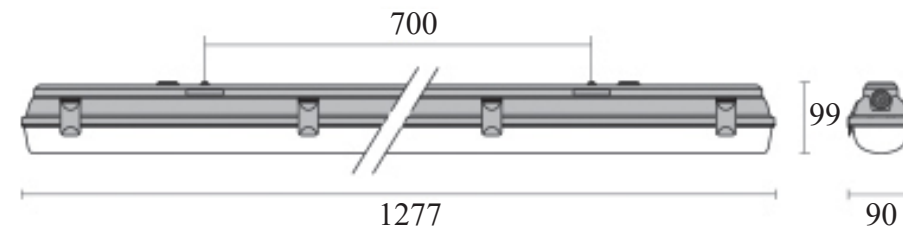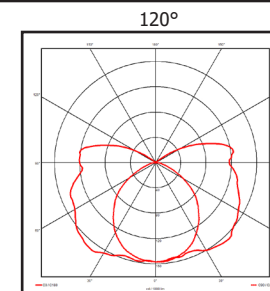

4Kg	4500lm	39W	102lm/W
-----	--------	-----	---------

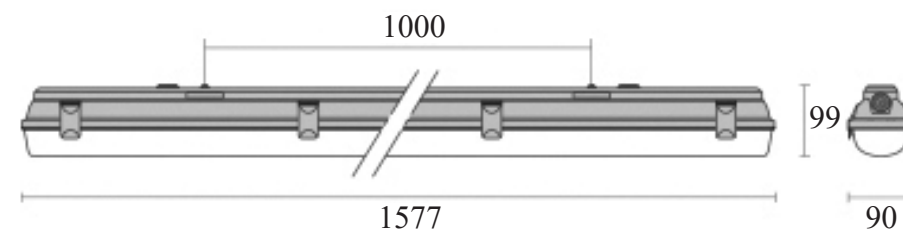

4Kg	5250lm	45W	116lm/W
-----	--------	-----	---------