

# Fiche Technique

## Midi Luna LED

☐ Blanc
 ☐ Noir
 ☐ Gris
 ☐ Chromo
 ☐ RAL



### Caractéristiques:

Taille de découpe	N/A
Min. hauteur encastrée	N/A
Poids	T.B.A
IP	20
Classe d'isolation	II
Essai du fil incandescent	850 °C
RoHS	Oui
Sans UV	Oui
Certification	CE

### Source de lumière:

Température de couleur	2700K - 3000K - 3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Refroidissement	Passif
Efficience	92%
SDCM	<3
Durée de vie	50.000h
LB valeur	L80B10


### Options:

Barndoors	Oui
Nid d'abeille	Oui
Filtre UV	Oui
Couleurs Filtres	Oui
Dimmable	DALI & Casambi
Eclairage de secours	Non
Fixpoint	Non



### Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	23W

### Reflectors:



**Projection**.eu  
CREATIVE SOLUTIONS IN SHOP LIGHTING

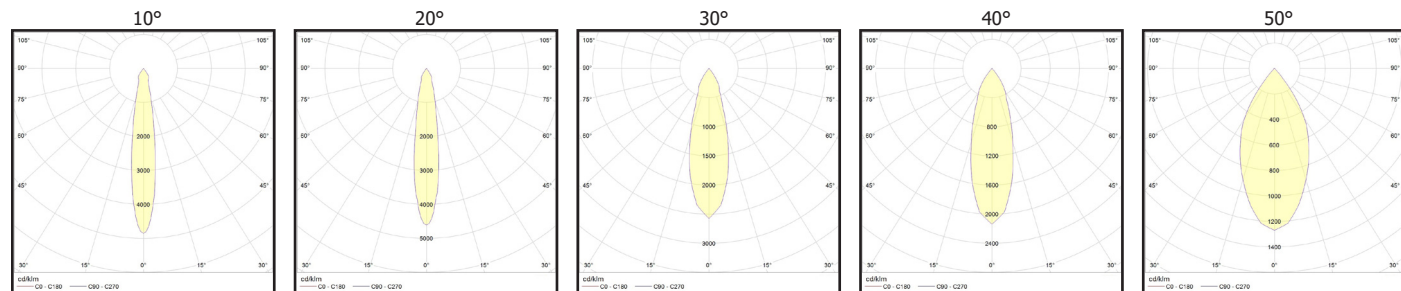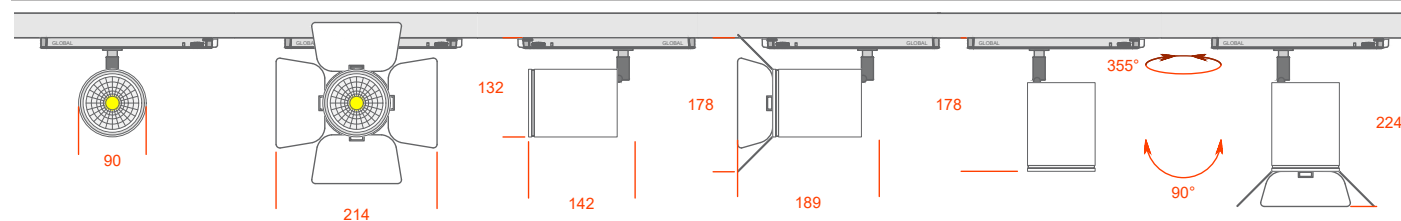

	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
700	-	-	-	-	-	-	-	-	-
1000	-	11.5W	-	-	117	122	122	128	131
1500	11.5W	13.0W	149	150	119	124	124	130	133
2000	15.0W	16.5W	150	153	119	119	119	125	128
2500	16.5W	23.0W	149	152	105	108	108	114	117
3000	23.0W	-	131	134	-	-	-	-	-
3500	27.0W	-	129	132	-	-	-	-	-
4000	-	-	-	-	-	-	-	-	-
5000	-	-	-	-	-	-	-	-	-

# Data Sheet

## Midi Luna LED

☐ White
 ☐ Black
 ☐ Grey
 ☐ Chrome
 ☐ RAL



### Characteristics:

Cut-out size	N/A
Min. recessed height	N/A
Weight	T.B.A
IP	20
Isolation class	II
Glow wire test	850 °C
RoHS	Yes
UV free	Yes
Certification	CE

### Light source:

Colour temperature	2700K - 3000K - 3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Cooling	Passif
Efficiency	92%
SDCM	<3
Lifetime	50.000h
LB value	L80B10


### Options:

Barndoors	Yes
Honeycomb	Yes
UV filter	Yes
Colour Filters	Yes
Dimmable	DALI & Casambi
Emergency light	No
Fixpoint	No



### Power supply:

Driver	Included
Voltage	230V
Max. power	23W

### Reflectors:



**Projection**.eu  
CREATIVE SOLUTIONS IN SHOP LIGHTING

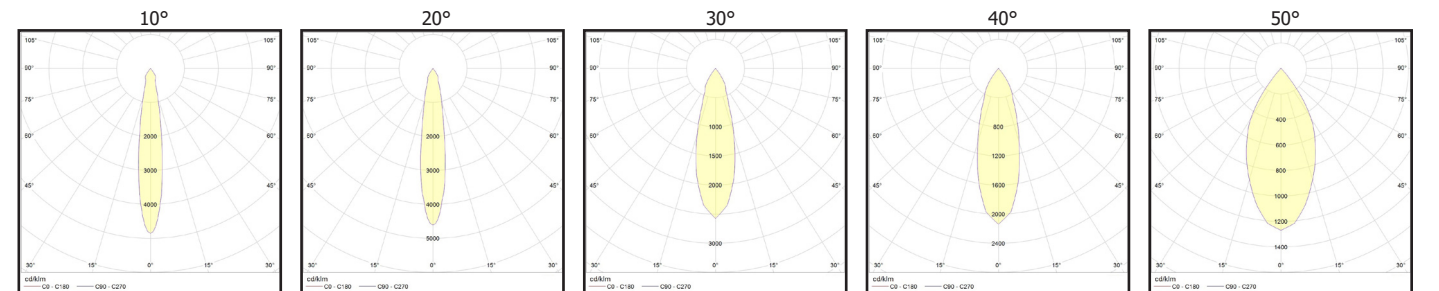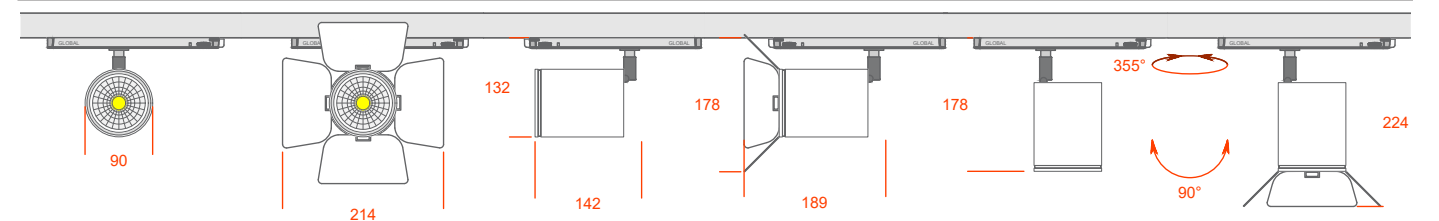

	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
700	-	-	-	-	-	-	-	-	-
1000	-	11.5W	-	-	117	122	122	128	131
1500	11.5W	13.0W	149	150	119	124	124	130	133
2000	15.0W	16.5W	150	153	119	119	119	125	128
2500	16.5W	23.0W	149	152	105	108	108	114	117
3000	23.0W	-	131	134	-	-	-	-	-
3500	27.0W	-	129	132	-	-	-	-	-
4000	-	-	-	-	-	-	-	-	-
5000	-	-	-	-	-	-	-	-	-