


Fiche Technique

Piazza LED

☐ Blanc
 ☐ Noir
 ☐ Gris

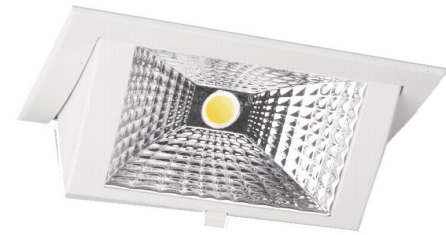

Caractéristiques:

Taille de découpe	218 x 125mm
Min. hauteur encastrée	100mm
Poids	1.2kg
IP	20
Classe d'isolation	III
Essai du fil incandescent	850 °C
RoHS	Oui
Sans UV	Oui
Certification	CE

Source de lumière:

Température de couleur	2700K - 3000K -
	3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Refroidissement	Passif
Efficience	92%
SDCM	<3
Durée de vie	50.000h
LB valeur	L80B10



Alimentation:

Driver	Inclus
Voltage	230V
Max. puissance	46.2W

Options:

Barndoors	N/A
Nid d'abeille	N/A
Filtre UV	Oui
Couleurs Filtres	Oui
Dimmable	DALI & Phase* & Casambi
Eclairage de secours	Non
Fixpoint	N/A

Reflectors:

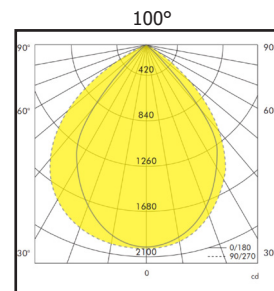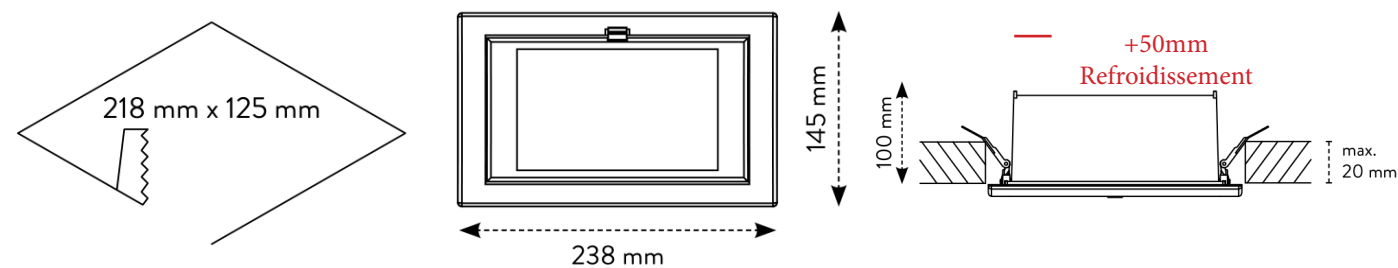

	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
*700	7.2W	7.1W	96	101	102	106	106	111	114
*1500	10.8W	11.6W	159	145	126	130	130	137	141
2000	13.0W	16.7W	155	158	120	124	124	131	134
2500	16.7W	20.6W	150	153	117	121	121	127	131
3000	20.7W	26.0W	145	148	112	116	116	122	125
3500	24.7W	31.0W	142	144	108	112	112	118	121
4000	29.8W	37.5W	136	139	103	107	107	113	116
5000	35.8W	46.2W	144	147	110	115	115	120	124
6000	46.2W	-	136	139	-	-	-	-	-

Data Sheet

Piazza LED

☐ White
 ☐ Black
 ☐ Grey



Characteristics:

Cut-out size	218 x 125mm
Min. recessed height	100mm
Weight	1.2kg
IP	20
Isolation class	III
Glow wire test	850 °C
RoHS	Yes
UV free	Yes
Certification	CE



Light source:

Colour temperature	2700K - 3000K -
	3500K - 4000K & PW
CRI	Ra 80 & Ra 90
Cooling	Passif
Efficiency	92%
SDCM	<3
Lifetime	50.000h
LB value	L80B10

Power supply:

Driver	Included
Voltage	230V
Max. power	46.2W

Reflectors:

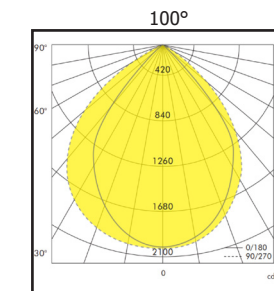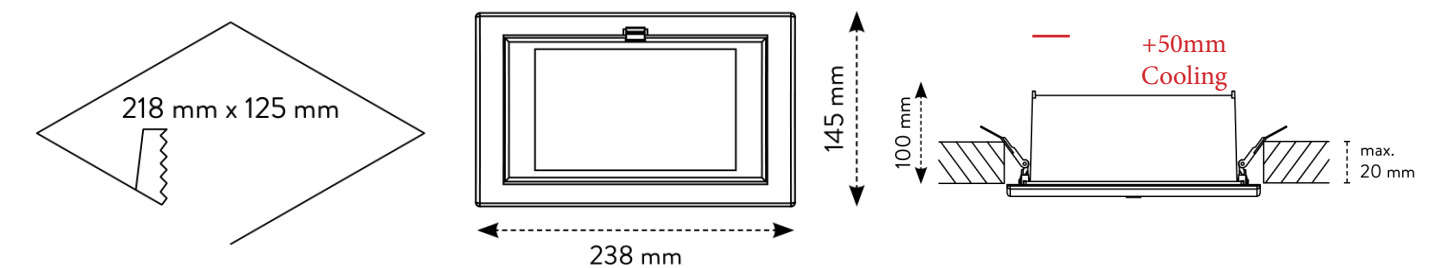

	Ra 80	Ra 90	830	835	927	930	930PW	935PW	940PW
Lumen	Power (W)	Power (W)	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt	Lumen/Watt
*700	7.2W	7.1W	96	101	102	106	106	111	114
*1500	10.8W	11.6W	159	145	126	130	130	137	141
2000	13.0W	16.7W	155	158	120	124	124	131	134
2500	16.7W	20.6W	150	153	117	121	121	127	131
3000	20.7W	26.0W	145	148	112	116	116	122	125
3500	24.7W	31.0W	142	144	108	112	112	118	121
4000	29.8W	37.5W	136	139	103	107	107	113	116
5000	35.8W	46.2W	144	147	110	115	115	120	124
6000	46.2W	-	136	139	-	-	-	-	-